idPoint Control Board
MCB004

Basic Features

- idPoint Controller fits any type of installations up to 20,000 users from single buildings to multiple sites spread over remote locations and linked via RS485, RS232 or TCP/IP.
- The user-friendly software programs the system within a few minutes.
- Software provides numerous access control and alarm monitoring features: expiry date, interlock between two doors, time zones, supervision, anti-passback, activity reports.
- Each alarm input is programmable: operating mode (NO or NC), time zones, local reflex (activation of outputs according to input status).
- Specific alarms are triggered according to the number of unsuccessful attempts, the time limit for door closing (door alarm), duress code.
- Whenever required, the data stored in the controllers is transferred to the computer and activity reports are printed.
- Each controller works independently.

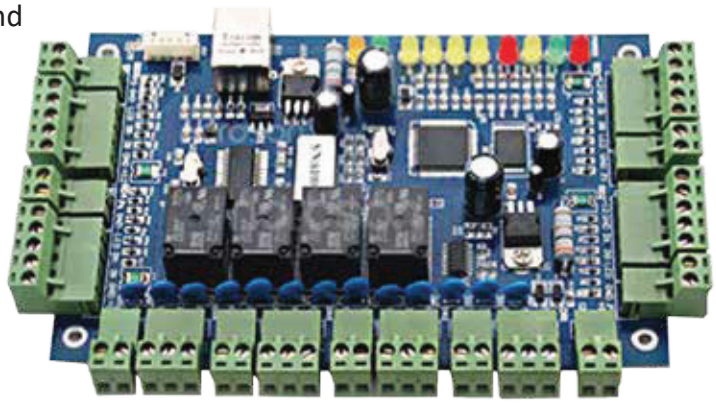

Model #	MCB004
Parameter	Multi Door (4) Control Panel
Description	Control 4 door, either 4x readers or 2x reader and 2x button
Size of PCB board	160mm x 106mm
Power Supply	12VDC 4-7A
Input Format of Reader	Wigand 26 (All card reader with compatible protocol)
Communication	RS232 / RS485
Readers support	4
Doors Controlled	4
Max Qty of Controllers	256
Operation Temperature	-0 C ~ 70 C
Humidity	10-90 % RH , No Condensation
Users Capacity	20,000
Buffer Capacity	100,000 event buffers

Riyadh HO
Tel: 4657722 / Fax: 4661323
Email: salesr@aflak.com.sa

Jeddah Branch
Tel: 6736677 / Fax: 6554516
Email: sales@aflak.com.sa

Al-Khobar Branch
Tel: 8644070 / Fax: 8986549
Email: aflakkhob@aflak.com.sa

w w w . a f l a k . c o m . s a